

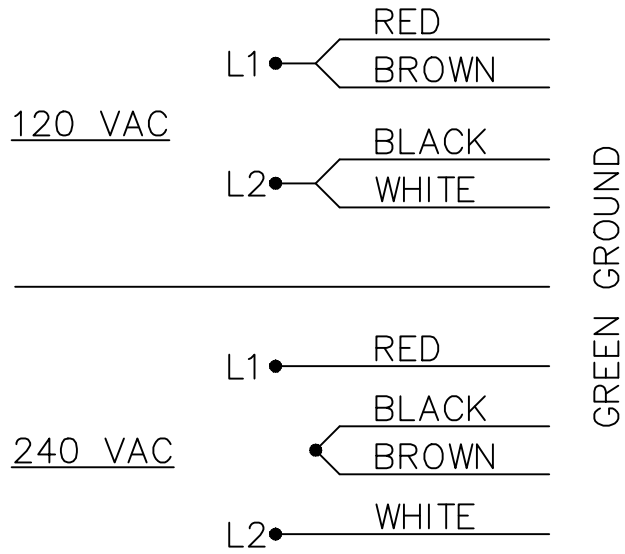
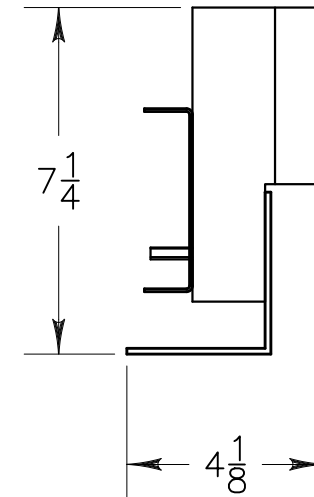



WIRING DIAGRAM

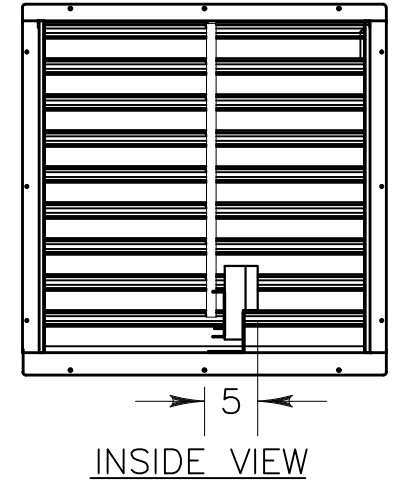

IMPEDANCE PROTECTED
RATING 0.5 AMP
60 HERTZ

RATED VOLTAGE: 120/240 VAC, 60 Hz
 ROTATION: CCW
 LOADED SPEED: 2.0 RPM
 LOADED CURRENT: 0.12/0.07 A
 STALL CURRENT: 0.16/0.09 A

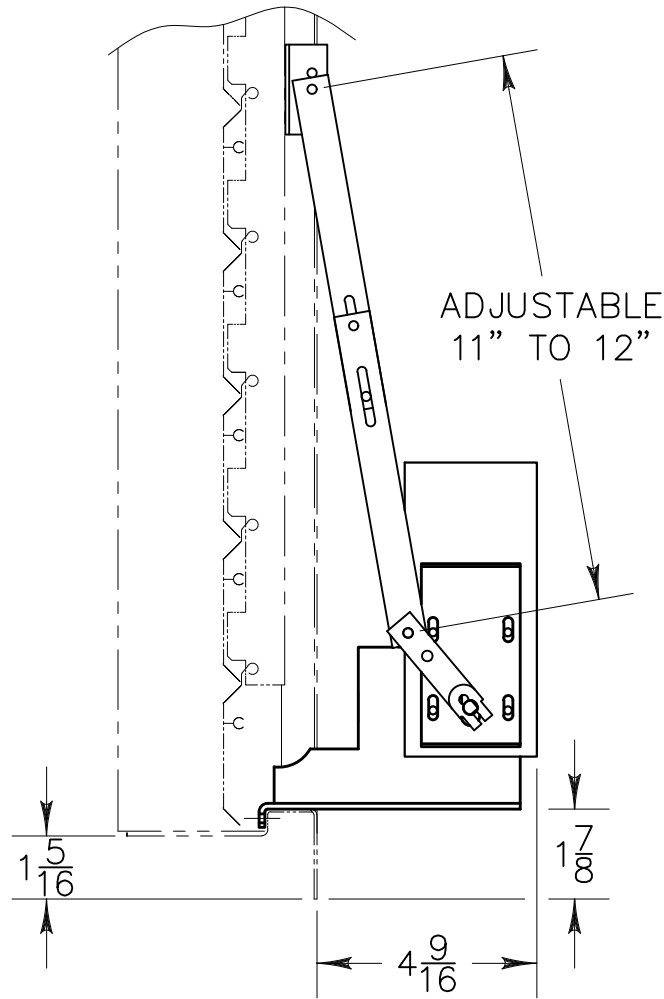

 TRIANGLE ENGINEERING OF ARKANSAS, INC.	SHUTTER MTR OPERATOR OUTLINE DIMINSIONS	
	IWS3187	REV
DR. BY: TOM KING	CKD.	APP.
SHEET 1 OF 1	DO NOT SCALE	12 APR 2017